



South Partial-Elevation of Hallway 1 Wall

East Partial-Elevation of Hallway 2 Wall

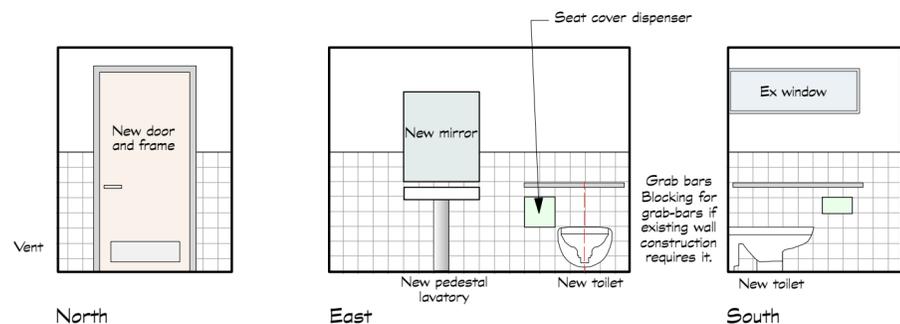


Toilet Room A - ADA accessible

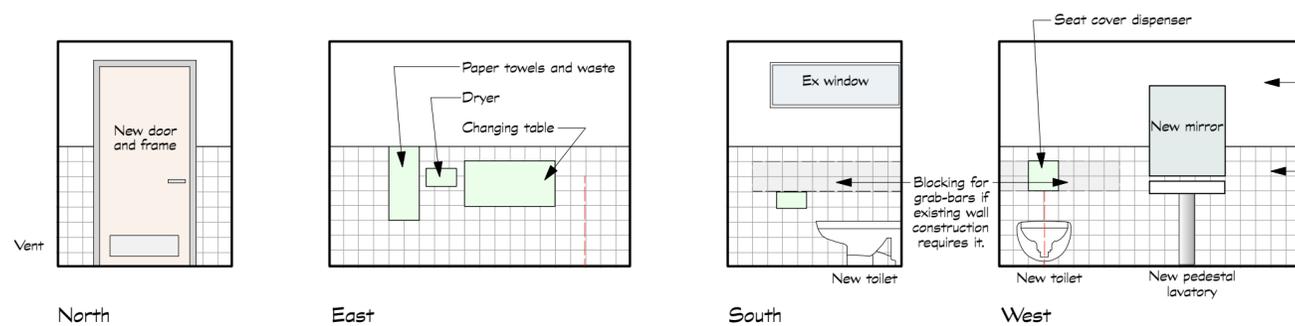

Toilet Room B - adaptable

Congregation Beth Israel
Existing toilet room renovations



Note:
Not all fixtures and dispensers are depicted. But when selected, they need to be installed as per the 2010 ADA Standards to avoid encroachment on required maneuvering dimensions.

Owner's rep and architect [ADA specialist] will verify location of all fixtures.

Notes applicable to both Toilet Rooms

- Remove all existing finish materials and fixtures to existing plaster walls
- Remove all partitions to create 2 single-user toilet rooms, but demising wall between existing toilet rooms to remain
- Widen door openings to accept 36" wide doors and frames
- Mount new grab-bars at 34" +/- 1" in accessible toilet room
- Provide blocking for future grab-bars at 36" +/- 2" in adaptable toilet room B, if existing wall requires it
- Provide new ceramic tile at floor and as a wainscot to 48" high. Owner to select material.

Owner to select all fixtures:

Toilet
Centerline of toilet to be 17" +/- 1" from finished wall

Lavatory
Lavatory to be mounted 34" above finished floor, maximum, with 27" clearance underneath, minimum, and any exposed piping to be wrapped with insulating material

Mirror
Mirror bottom shall extend down to 40" maximum [the reflecting part], preferably even lower

TP dispenser
TP dispenser shall be mounted with CL 8" from face of toilet and 15" minimum above finished floor

Changing table
Place changing table at height as recommended by Manufacturer

Note
Before installing any fixtures, the contractor will lay out their intended locations for review by the Owner's Rep and the Architect [who is also an ADA Specialist]

